

Contact us

www.homesafety.honeywell.com
www.honeywellanalytics.com
www.honeywell.com

Honeywell

UK customer service centre:

Honeywell Analytics Ltd.
4 Stinson Road
Nuffield Industrial Estate
Poole, Dorset BH17 0RZ
Tel: +44 (0)1202 645577
Fax: +44 (0)1202 665331
customerservice@honeywell.com


Please Note:
While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract. Please refer product documentation for the lifetime of the product.

A05-0501-001
13507_MANN0993 Issue 1_08/15_EN
© 2015 Honeywell Analytics


Acts for and on behalf of Life Safety Distribution AG,
Jägerstrasse 2, 8604 Hegnau, Switzerland by
Its Authorised Representative Honeywell Inc.



XW100 Wireless Module

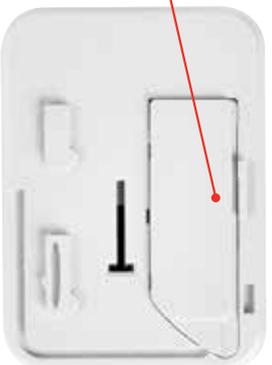

Wireless
module
cavity

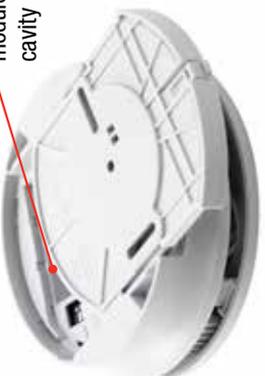

Wireless
module
cavity



Wireless Module LED



Wireless
Module
LED

1. Creating a new network

Follow these steps to create a new network using your XW100 Wireless Module

1. Release the alarm from its mounting plate using a screwdriver
2. Insert the wireless module in the host alarm by placing it in the cavity on the rear of the alarm; ensuring the antenna is on the side with the exposed connectors
3. Fold the antenna between the outer rim and module casing
4. Reactivate the alarm by sliding it back onto the mounting plate until it clicks
5. Press the button on the front of the alarm twice
6. The blue LED will flash indicating how many alarms are present in the network. Long flash = 5 alarms, short flash = 1 alarm
Eg. 7 alarms = 1 x long flash + 2 x short flash
3 alarms = 3 x short flash
7. Repeat for each alarm to go into the network
8. When the number of flashes on each configured alarm indicates the correct number of modules present in the network, the configuration session can be completed by pressing the alarm button once, providing the alarm has been turned on for more than 30 seconds
9. Your XW100 Wireless Module is now functioning correctly

2. Adding a XW100 Wireless Module to a network

Follow these steps for adding a XW100 Wireless Module to a network

1. Release the alarm from its mounting plate using a screwdriver
2. Insert the wireless module in the host alarm by placing it in the cavity on the rear of the alarm; ensuring the antenna is on the side with the exposed connectors
3. Fold the antenna between the outer rim and module casing
4. Release an alarm already in the network from its mounting plate using a screwdriver
5. Turn the alarm already in the network over and press the wireless module button three times
6. Press the wireless module button on the new alarm three times
7. The blue LED will flash indicating how many alarms are present in the network. Long flash = 5 alarms, short flash = 1 alarm
8. When the number of flashes indicates the correct number of alarms in the network, press the button on both modules for 3 seconds to end the configuration procedure
9. LEDs on both will flash for about 30 seconds
10. Your XW100 Wireless Module is now functioning correctly
11. Repeat for each alarm to go into the network
12. Reactivate the alarms by sliding them back onto their mounting plate until it clicks

Please refer to the manual for further information and troubleshooting.